



**wood**



**WICANDERS®**

Nature at your feet

**Amorim Revestimentos**

Rua do Ribeirinho 202  
P. O. Box 13  
4536-907 S. Paio de Oleiros  
PORTUGAL

p\_ (+351) 227 475 600  
e\_ wicanders.ar@amorim.com  
**www.wicanders.com**

# Enabling wellbeing in every room



Rustic Forest Oak





# WICANDERS®

Nature at your feet

Wicanders has a legacy that goes back to 1868 and is the global leading brand in flooring products with cork technology. Present in more than 70 countries, its promise is to provide Floors for Living, ready for real life, for our home and office, for our different rhythms, for our family and pets, for all those wonderful and simple, yet sometimes unexpected moments. Floors for our lives.

Over the years, Wicanders has developed sustainable floor and wall coverings with exclusive properties due to its innovative Corktech technology. By combining state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved. Available with cork, wood and stone looks, its products are able to provide a silent and thermally insulated environment, that endures impacts and is very comfortable to walk and stand on.

Wicanders means wellbeing, a choice for life!

---











## FROM NATURE, TO YOUR SPECIAL SPACE.

Technology only makes sense if it improves people's lives. This concept finds expression in products developed with Corktech technology.

By using a unique engineered multilayer structure, which combines state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved, providing the perfect match between design and wellbeing.

Wicanders uniqueness is daily achieved by continuously research on how end customers think and live their spaces. Wicanders brings to the market products that provide a silent and thermally insulated environment, that endures through time and are sustainable at the same time.



**Silence**



**Natural  
Thermal Insulation**



**Walking Comfort**



**Impact  
Resistance**





Light Dawn Oak



**wood** Go 09

**wood** Essence 23

**wood** Resist 35

**wood** Resist<sup>+</sup> 47

**wood** hydracork 63

**GET THE BEST RESULTS WITH  
WICANDERS ACCESSORIES!** 80


**CREATED BY HUMANS,  
INSPIRED BY NATURE** 82

**CORK - A SUSTAINABLE  
RAW MATERIAL** 83

**PRODUCT SELECTOR** 84

**WICANDERS' RANGE** 91



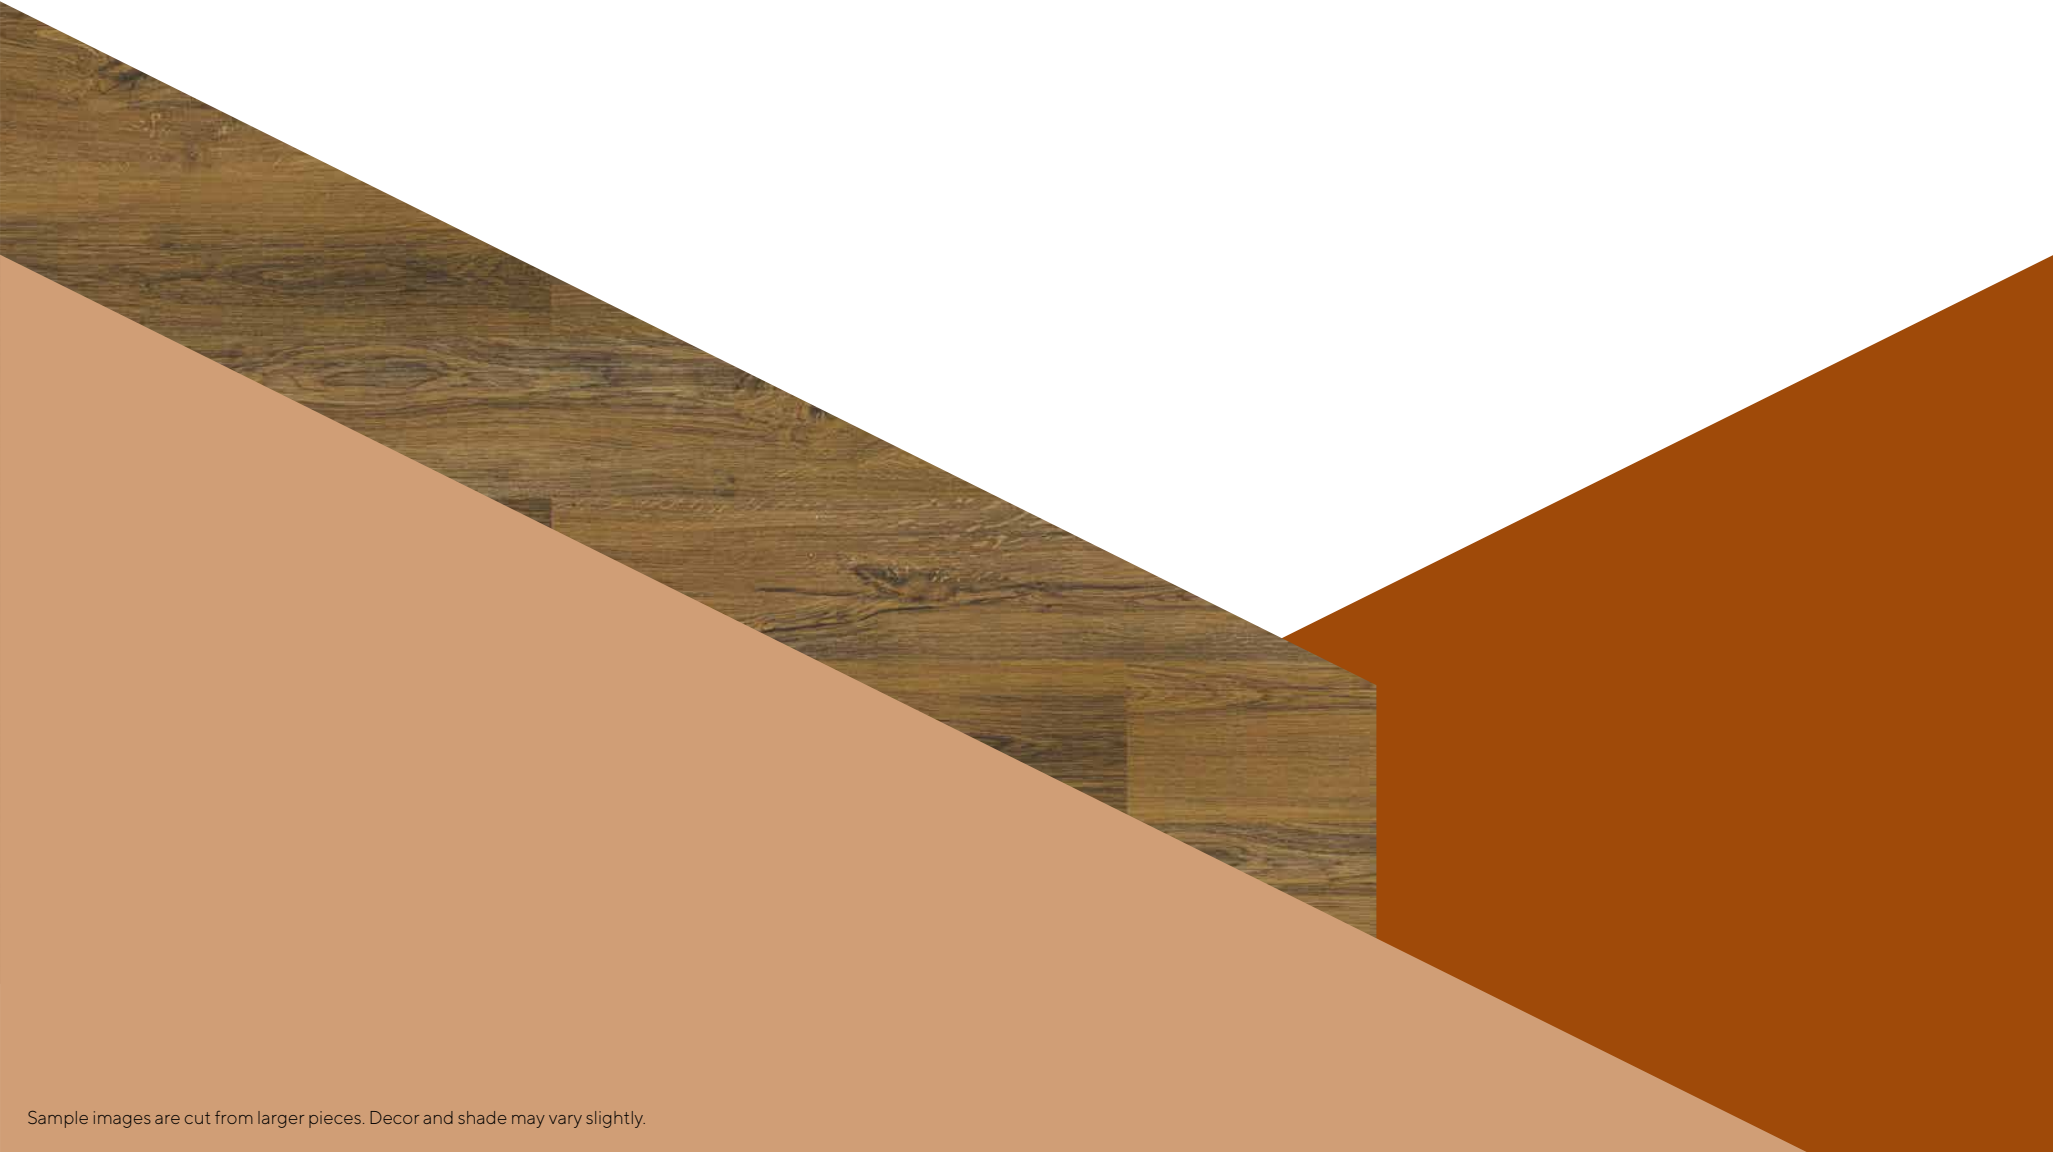




Sample images are cut from larger pieces. Decor and shade may vary slightly.

# wood Go

## Formats

1220 x 185 x 10,5mm  
48 x 7 1/4 x 3/8"




RANGE	Go	   
	Essence	 
	Resist	 
	Resist <sup>+</sup>	  
	Hydrocork	  


 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas


 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof

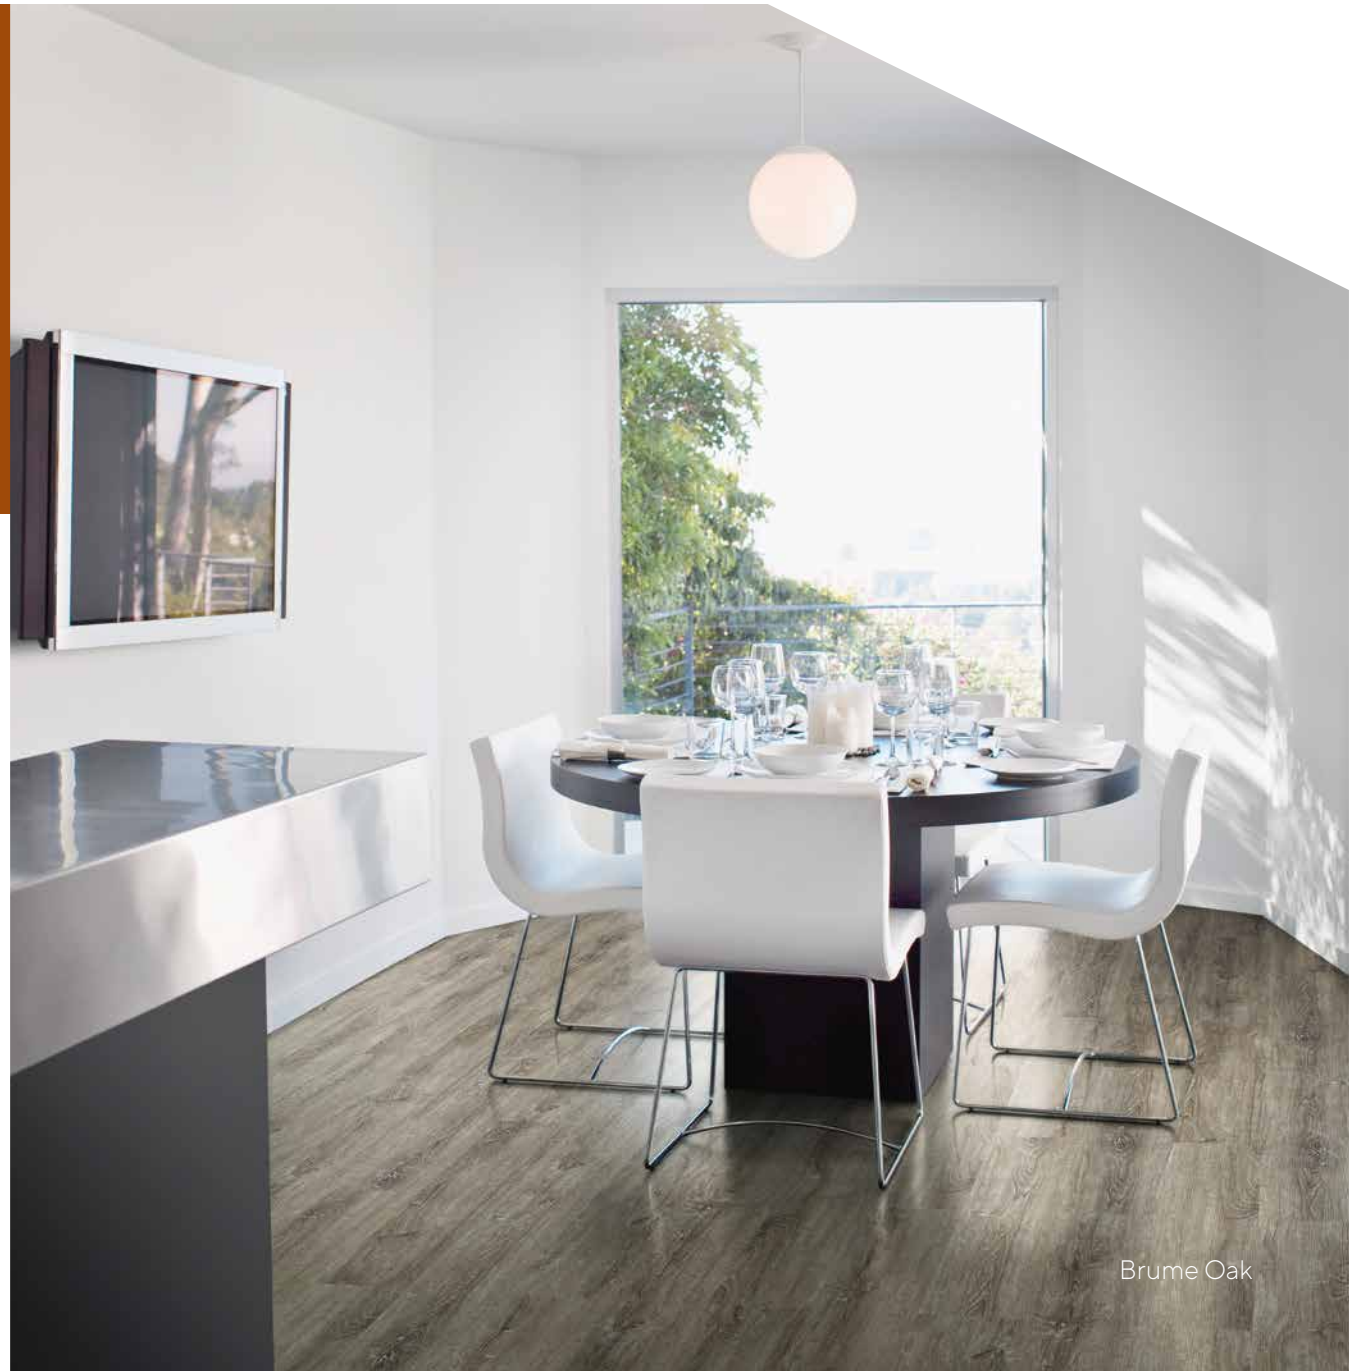

Brume Oak





Blonde Oak

BON1001


1220 x 185 x 10,5mm



European Oak

BOQ2004

1220 x 185 x 10,5mm

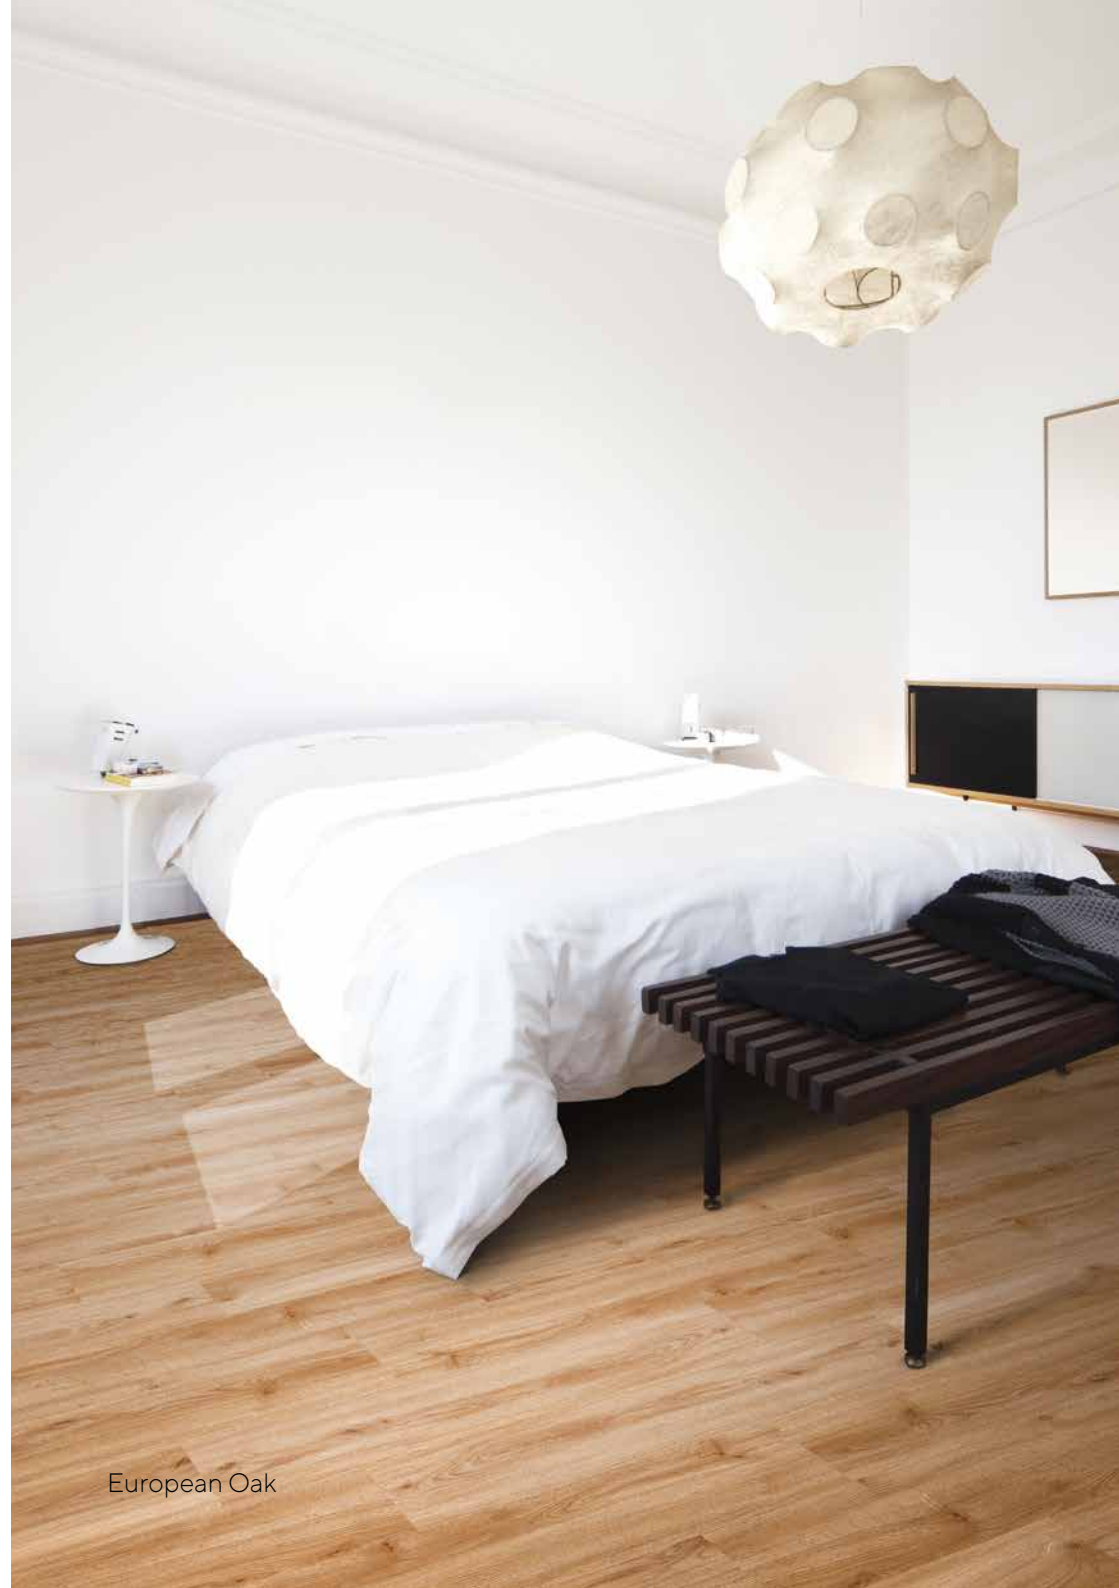

European Oak

## Tradition

# Keeping your comfort is our tradition.

Flooring is one of the most important structural decisions when decorating a space from scratch or remodeling one. The hue and style you choose for the floor of your space sets the tone for the ambiance to be built and it's always an extension of you and your style.

These 6 golden wood visuals are the Traditional approach that will go along with different types of furniture and will not overstep the overall decoration.

The bedroom is a space where you can have inner time and relax before each morning's rush. The comfort of your bed is crucial as is also the pleasant touch of walking barefoot on the floor - that's what Wicanders products can provide: beauty and thermal comfort.



Savanna Limed Oak  
B0N6001

1220 x 185 x 10,5mm



Classic Nature Oak  
B0S3001

1220 x 185 x 10,5mm



Amber Cherry  
B0Q7003

1220 x 185 x 10,5mm



Light Sucupira  
B0O9001

1220 x 185 x 10,5mm







White Oak  
BOM8001

1220 x 185 x 10,5mm



Frozen Oak  
BON9001

1220 x 185 x 10,5mm

## Nordic

Innovation always  
finds original ways  
of expression.

Nordic-colour flooring visuals have the power to impact ambiances in a contemporary way. You may change the decor over time and the gentleness and lightness effect provided by the flooring will remain.

Whether it's a light or dark grey flooring in a minimalist and functional decor that characterizes the scandinavian style, these spaces can be highly personalized and welcoming.



White Oak



Platinum Oak  
BOM6001

1220 x 185 x 10,5mm



Storm Oak  
BON3001

1220 x 185 x 10,5mm



Brume Oak  
BON8001

1220 x 185 x 10,5mm



Midnight Oak  
BOM5001

1220 x 185 x 10,5mm



Quartz Larch  
BOW3001

1220 x 185 x 10,5mm





Ivory Salt Oak

BON2001

1220 x 185 x 10,5mm



Alaska Oak

BOQ0003

1220 x 185 x 10,5mm



Chalk Oak

BOQ1003

1220 x 185 x 10,5mm



Indian Dark Oak

BOS5001

1220 x 185 x 10,5mm

## Cottage

To drive the look home in your living room, opt for a Cottage look flooring and for one statement-making element to finish off the space and become the focal point of the room.

Adding a pattern with geometric and organic design in the pillows can create a striking visual break that contrasts with the remaining solid colours.





Croft Oak

BOV9001

1220 x 185 x 10,5mm



Bark Oak

BOV8001

1220 x 185 x 10,5mm

Bark Oak



wood Go



Polar Nature Oak

BOR9001

1220 x 185 x 10,5mm



Polar Nature Oak



Old Larch

BOW6001

1220 x 185 x 10,5mm



Natural Larch

BOW5001

1220 x 185 x 10,5mm



Oiled Taupe Oak

BOWA001

1220 x 185 x 10,5mm



Provence Oak

BOQ3003

1220 x 185 x 10,5mm



Fall Pine

BOS0001

1220 x 185 x 10,5mm



Highland Pine

BOS1001

1220 x 185 x 10,5mm



## Reclaimed

These three exciting flooring looks result from the combination of life's soul with contemporary novelty.

Enjoy them to the fullest by mixing industrial, time-worn, and contemporary decor elements. Your living room will achieve an exciting variety as well as a cohesive flair that unifies the Reclaimed style.



Shell Oak

BON4001

1220 x 185 x 10,5mm





Limes White Rustic Oak  
BOWB001

1220 x 185 x 10,5mm



Rustic Taupe Oak  
BOWC001

1220 x 185 x 10,5mm



# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM



# Finishing & Warranty





Suitable for Heavy Traffic Residential areas and Moderate Traffic Commercial areas.



Suitable for Heavy Traffic Residential areas and Medium Traffic Commercial areas.



# Technical Data Sheet

Floating			
			0,2mm Wear Layer   0,3mm Wear Layer 1220 x 185 x 10,5mm   48 x 71/4 x 3/8"
Level of use Domestic	ISO 10874	Class	
Level of use Commercial	ISO 10874	Class	
	Standard - Test Method	Unit	Specification EN 14085 + ISO 10582

## General Properties

Dimensions	ISO 24342	mm	± 0,10 up to max. 0,5 max. 2,0
Overall thickness	ISO 24346	mm	± 0,25
Straightness measured at the surface layer	ISO 24342	mm	≤ 0,30
Squareness	ISO 24342	mm	≤ 0,50
Apparent density	EN 672	Kg/m <sup>3</sup>	Nominal (930) ± 50
Mass per unit area	ISO 23997	g/m <sup>2</sup>	Nominal +13% / -10%
Dimensional stability (humidity)	EN 669 (Annex C)	mm	≤ 5
Dimensional stability (heat)	EN 14085 Annex C/ EN 669	%	-
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,20
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15
Residual indentation	ISO 24343-1	mm	≤ 0,15
Colour fastness	ISO 105-BO2	Blue wool scale	≥ 6



# Technical Data Sheet

## Floating

**0,2mm Wear Layer | 0,3mm Wear Layer**  
**1220 x 185 x 10,5mm | 48 x 7 1/4 x 3/8"**

### Classification properties - EN 655 + EN 649 + EN 14085

Wearing Group	EN 660-1	Thickness loos ( $\Delta$ Imm)	-
Overall thickness (Vinyl + Cork layer)	ISO 24346	mm	-
Thickness of wear layer (Wear Group T)	ISO 24340	mm	0,2
Castor chair	EN 425	Visual effect - after 25 000 cycles	No disturbance to the surface other than slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a type 2 foot

### Safety properties - EN 14041

Fire resistance	EN 13501-1	Class	B <sub>fl</sub> s1
Slip classification	EN 13893	Class	DS
Formaldehyde emission	DIN EN 717-1	Class	E1
Electrical behaviour	EN 1815	KV	Antistatic
Content pentachlorophenol (PCP)	CEN/TR 14823 (Ihd-W 409)	mg/Kg	-
	EN 14041 Annex B	%	Undetectable

### Additional properties

Stains resistance	ISO 26987 (a)	Grade	Grade 0 (b) Iodine Grade 2 (b)
Thermal resistance	EN 12667	(m <sup>2</sup> K)/W	R ≤ 0,15
Impact sound reduction	ISO 140-8	dB ( $\Delta$ L <sub>w</sub> )	16
Walking noise	IHD - W431	dB (A)	Reduction improvement 11,4 dB (A) Difference of loudness 45,4%



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.

(a) The following products were tested: disinfectant, C<sub>2</sub>H<sub>5</sub>OH, NH<sub>4</sub>OH, citric acid, iodine, petroleum, spirit.

(b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong Change.

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on [www.wicanders.com](http://www.wicanders.com)








# wood Essence


## Formats

1220 x 185 x 10,5mm  
48 x 7 1/4 x 3/8"

1830 x 185 x 11,5mm  
72 x 7 1/4 x 1/2"




RANGE	Go	   
	Essence	 
	Resist	 
	Resist <sup>+</sup>	  
	Hydrocork	  


 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas


 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof

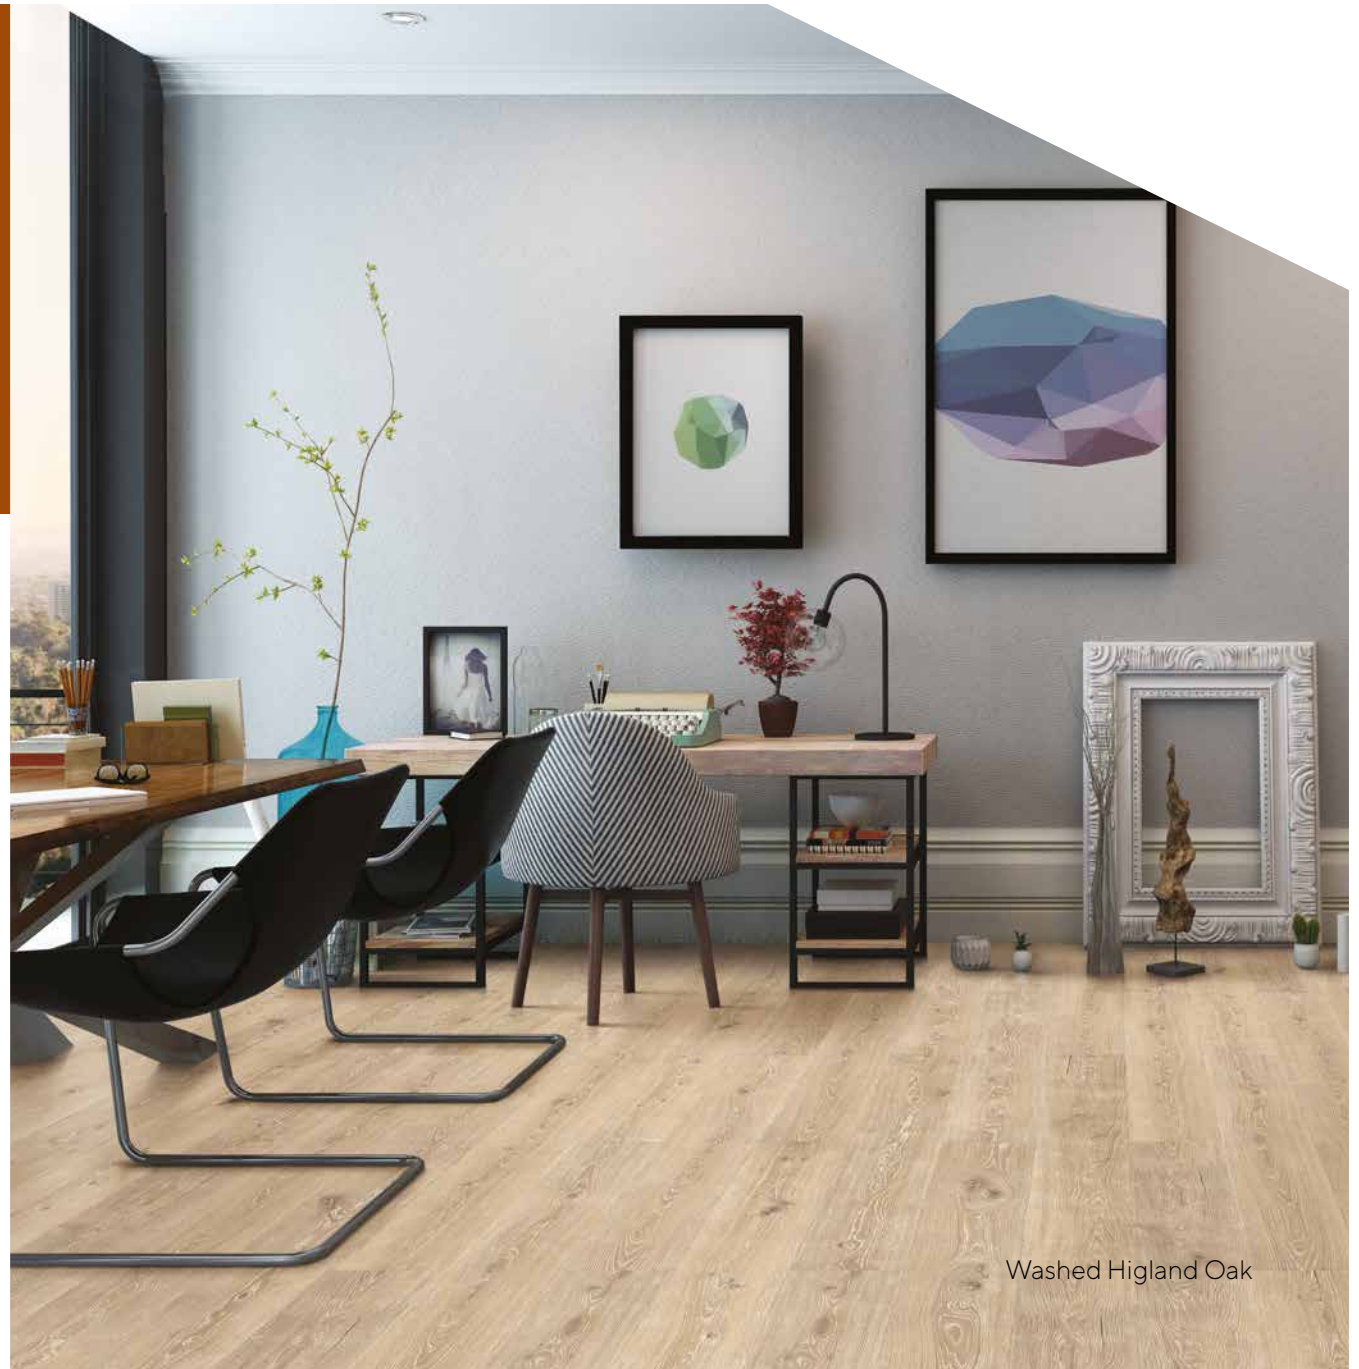

Washed Highland Oak





Prime Desert Oak

D8F5001

1830 x 185 x 11,5mm



Classic Prime Oak

D8F4001

1830 x 185 x 11,5mm



Golden Prime Oak

D8F7001

1830 x 185 x 11,5mm



Prime Rustic Oak

D884002 1220 x 185 x 10,5mm

D884001 1830 x 185 x 11,5mm



Country Prime Oak

D8F8001

1830 x 185 x 11,5mm



Prime European Cherry

D826003

1220 x 185 x 10,5mm



## Tradition

# Turning dreams into reality.

Flooring has the ability to create or change the mood of every space. Depending on the style that you want to create throughout your home, you can choose between flooring looks that will totally impact the overall style or the ones that will turn the furniture set in a more low profile approach.

A living room is the social area of a home and it needs to be both a casual and a formal space that will act as a comfortable space to enjoy family time or to host a special event.

Flooring visuals with a Tradition look like these 8, offer the perfect complement to your furniture providing a sophisticated ambiance.



## Dapple Oak

D8F1001

1830 x 185 x 11,5mm



## Ivory Chalk Oak

D887001 1220 x 185 x 10,5mm

D887002 1830 x 185 x 11,5mm

Ivory Chalk Oak





## Nordic

When going for a soothing and luminous ambiance, go with the Nordic style!

Wake up your bedroom with adorable pastel colours combined with a floor in a soothing colour palette of grays and the result will be a gorgeous bedroom prepared to greet you every night and morning. Splashes of colour will definitely be a great addition!



### Prime Arctic Oak

D8F6001

1830 x 185 x 11,5mm





Platinum Chalk Oak



Platinum Chalk Oak

D886002 1830 x 185 x 10,5mm

D886001 1220 x 185 x 11,5mm



Nebula Oak

D8F3001

1830 x 185 x 11,5mm



Coal Oak

D8F2001

1830 x 185 x 11,5mm



Inspired Pine

D898001

1220 x 185 x 10,5mm





## Cottage

When aiming to build your living room with an impactful decor identity filled with an overall neutral palette, choose one of these 7 charming looks and embrace a cohesive Cottage style by adding some nature inspired elements with rustic wood furniture.



## Nebraska Rustic Pine

D885001 1220 x 185 x 10,5mm

D885002 1830 x 185 x 11,5mm



Nebraska Rustic Pine



Washed Haze Oak

D8G2001

1830 x 185 x 11,5mm



Washed Arcaine Oak

D8G1001

1830 x 185 x 11,5mm



Washed Highland Oak

D8G3001

1830 x 185 x 11,5mm



Washed Castle Oak

D8G4001

1830 x 185 x 11,5mm



Rustic Forest Oak

D8G0001

1830 x 185 x 11,5mm



Rustic Eloquent Oak

D8F9001

1830 x 185 x 11,5mm







Sorrel Carve Oak



Glacier Rustic Pine

D822003

1220 x 185 x 10,5mm



Sorrel Carve Oak

D838003 1220 x 185 x 10,5mm

D838004 1830 x 185 x 11,5mm


# Reclaimed

## Exceeding expectations is an art form.

If you prefer to use flooring as the main focal point of your room, consider the rich tones and presence of these Reclaimed looks – ideal backgrounds to create a bold and strong atmosphere.

Striking textures of wood can be coordinated with a splash of bold colour in order to build up a powerful ambiance filled with details.

Reclaimed flooring and furniture are mirrors of history, able to enrich each space in a unique, craftsman way.

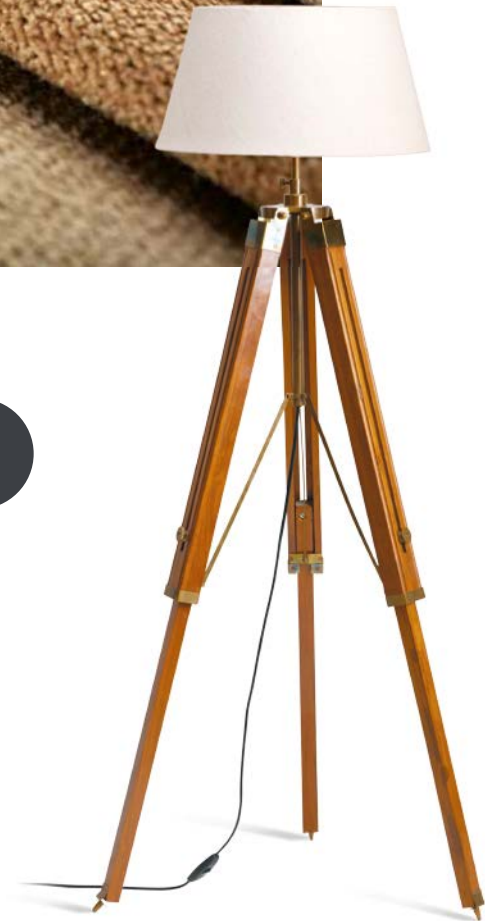



# Technical solution


PROTECTIVE WEAR LAYER

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK 3,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC


INTEGRATED CORK UNDERLAY 1,2MM

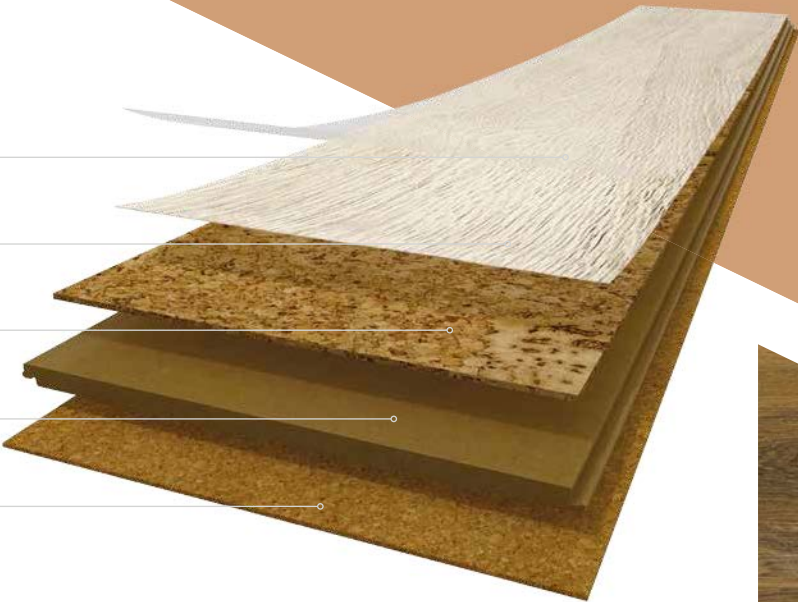



# Finishing & Warranty

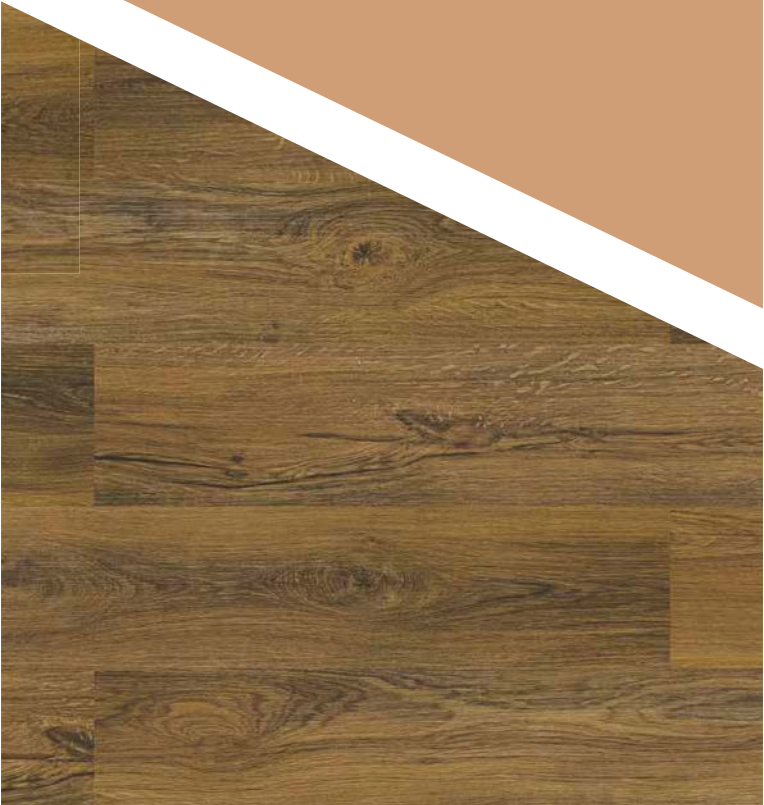

NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). Due to its chemical reaction during the hot coating process it is extremely wear resistant and highly flexible. This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



# Technical Data Sheet

Floating			
			<b>NPC</b> <b>1830 x 185 x 11,5mm</b>   72 x 7 1/4 x 1/2" <b>1220 x 185 x 10,5mm</b>   48 x 7 1/4 x 3/8"
Level of use Domestic	ISO 10874	Class	
Level of use Commercial	ISO 10874	Class	
Surface Finishing			Polyurethane moisture-curing
	Standard- Test Method	Unit	Specification

## General Properties EN 14085 + EN 12104 + EN 655 + EN 14041


Dimensions - Rectangular panels: Width Length	ISO 24342	% mm	± 0,10 with max. 0,5 max. 2,0
Overall thickness	ISO 24346	Average mm Individual values mm	Nominal ± 0,25 Maximum deviation from the average ± 0,30
Squareness Straightness measured at the surface layer	ISO 24342	mm	≤ 0,50 ≤ 0,30
Flatness of the panel Length: concave / convex Width: concave / convex	EN 14085 Annex A	%	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15
Openings between panels Average Individual values	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20
Height difference between panels Average Individual values	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20
Dimensional variation caused by changes in atmospheric humidity	EN 14085 Annex C / EN 669	%	≤ 5
Thickness of top cork surface	ISO 24346	mm	≥ 3
Peel resistance N/50 mm Average Individual values	ISO 24345	N/50 mm	
Wearing group	EN 660-1	Thickness loss (mm)	
Mass per unit area	ISO 23997	g/m²	8000 -/+10%
Apparent density Average Individual values	EN 672	Kg/m³	≥ 760 ≥ 95% nominal value



# Technical Data Sheet



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)

The Blue Angel is a voluntary certification that guarantees that a product or service meets high standards when it comes to its environmental, health and performance characteristics. In the process, these products and services are always evaluated across their entire life cycle.

(a) The following products were tested: acetone, coffee, NaOH, H<sub>2</sub>O<sub>2</sub> at 3%, black shoe cream.

(b) The following products were tested: Disinfectant, benzene, ammonium (NH<sub>4</sub>OH), ethanol (C<sub>2</sub>H<sub>5</sub>OH), citric acid, iodine.

(c) Grade 0 - Unchanged / Grade 1 - Very little change. With ethanol we got grade 1 after 2 hours.

(d) Suitable for floor heating systems, according to German Federal Association Radiant Panel Heating.

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on [www.wicanders.com](http://www.wicanders.com)

## Floating

### NPC

1830 x 185 x 11,5mm | 72 x 7 1/4 x 1/2"  
1220 x 185 x 10,5mm | 48 x 7 1/4 x 3/8"

### Classification properties - EN 14085 + EN 12104

Castor chair	EN 425	Visual effect after 25 000 cycles	No disturbance to the surface other than slight change in appearance and no delaminating shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible when tested with foot type 2
Thickness swelling floor panel	ISO 24336	%	≤ 18
Residual indentation	ISO 24343-1	mm	≤ 0,3

### Safety properties - EN 14041

Fire resistance	EN13501-1	Class	C <sub>fl</sub> s1
Slip classification	EN 13893	Class	DS
Formaldehyde emission	DIN EN 717-1	Class	E1
Electrical behaviour	EN 1815	KV	Not Antistatic
Content pentachlorophenol (PCP)	CEN/TR 14823 (jhd-W 409)	mg/Kg	PCP Free

### Optional properties














Stain resistance	EN 438 (a)	Grade	
	ISO 26987 (b)	Grade	Grade 0 = unchanged (c)
Light fastness	ISO 105-B02	Blue wool scale	
	EN 15187	Blue wool scale	> 6
Abrasion resistance	EN 14354 Annex D	Revolutions Wt	
	EN 13329 EN 14354	Class	AC6 WR3
Thermal resistance	EN 12667	(m <sup>2</sup> K)/W	R <sub>s</sub> 0.15 (m <sup>2</sup> K)/W (d)
Impact sound reduction	ISO 140-8	dB (Δ L <sub>w</sub> )	18
Walking noise	IHD - w431	dB (A)	Reduction improvement 12dB Difference of loudness 47,5%

# wood Resist

## Formats

1220 x 185 x 10,5mm  
48 x 7 1/4 x 3/8"





RANGE	Go	   
	Essence	 
	Resist	 
	Resist+	  
	Hydrocork	  

 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas

 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof



Linen Cherry





Sand Oak

BOR1001

1220 x 185 x 10,5mm



Castle Raffia Oak

BOP0001

1220 x 185 x 10,5mm

## Tradition

Light, vivid, and dry brown, are and always will be, timeless wood colours that can be placed in a wide variety of spaces and as a rich complement to diverse styles.

Choose your favourite hue and establish a solid design without any fear!



Castle Toast Oak

BOP1001

1220 x 185 x 10,5mm



Nature Oak

BOT5001

1220 x 185 x 10,5mm



Elegant Oak

BOR4001

1220 x 185 x 10,5mm



Castle Raffia Oak



Linen Cherry

BOR0001

1220 x 185 x 10,5mm



Light Beech

BOT0002

1220 x 185 x 10,5mm



Wheat Pine

BOR3001

1220 x 185 x 10,5mm





Limed Grey Oak

BOT7001

1220 x 185 x 10,5mm



Claw Silver Oak

BOV3001

1220 x 185 x 10,5mm



Claw Silver Oak

## Nordic

# Creating solutions. Reinventing comfort.

When choosing the perfect hue and look of flooring for your special space, you will consider if it matches your personal style in a timeless manner, and also if it will endure the test of time.

Wicanders products are impact resistant, sound and thermal insulators, so it's guaranteed that a sense of wellbeing meets what's offered to the eyes.

Your bedroom will be the perfect hideaway to the busy day-to-day life with a design and serene atmosphere.



## Rustic Limed Gray Oak

BOU0001

1220 x 185 x 10,5mm



## Cinder Oak

BOR7001

1220 x 185 x 10,5mm







Arcadian Soya Pine

BOP4001

1220 x 185 x 10,5mm



Arcadian Rye Pine

BOP5001

1220 x 185 x 10,5mm



Century Fawn Pine

BOP7001

1220 x 185 x 10,5mm



Smoked Rustic Oak

BOU4001

1220 x 185 x 10,5mm



## Cottage

In a cottage home style kitchen, you can focus more on individual pieces, and less on cohesive flow.

Embrace contrast by hanging an industrial lamp above a wooden breakfast table to add charisma.







Century Morocco Pine



Century Morocco Pine

BOP6001

1220 x 185 x 10,5mm



## Reclaimed

The strong warm colour variation and rich texture of these 3 Reclaimed looks are the perfect match to balance clean and light workspace furniture.



## Nordic Ash

B0V4001

1220 x 185 x 10,5mm





Sawn Twine Oak

BOP2001

1220 x 185 x 10,5mm



Sawn Bisque Oak

BOP3001

1220 x 185 x 10,5mm

Sawn Twine Oak



# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM





# Finishing & Warranty



Suitable for Heavy Traffic Residential areas  
and Heavy Traffic Commercial areas.



# Technical Data Sheet

Floating			
			0,55mm Wear Layer 1220 x 185 x 10,5mm   48 x 71/4 x 3/8"
Level of use Domestic	ISO 10874	Class	
Level of use Commercial	ISO 10874	Class	
	Standard-Test Method	Unit	Specification EN 14085 + EN 649

## General properties

Dimensions	ISO 24342	mm	± 0,10% up to width: max. 0,5 length: max. 2,0
Overall thickness	ISO 24346	mm	± 0,25
Straightness measured at the surface layer	ISO 24342	mm	≤ 0,30
Squareness	ISO 24342	mm	≤ 0,50
Apparent density	EN 672	Kg/m <sup>3</sup>	Nominal value (960) ± 50
Mass per unit area	ISO 23997	g/m <sup>2</sup>	Nominal value (10150) - 10 % + 13%
Dimensional stability (humidity)	EN 669 (Annex C)	mm	≤ 5
Dimensional stability (heat)	EN 14085 Annex C/ EN 669	%	-
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,20
Flatness of the panel (Length - concave / convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - concave / convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15
Residual indentation	ISO 24343-1	mm	≤ 0,15
Colour fastness	ISO 105-BO2	Blue wool scale	≥ 6



# Technical Data Sheet

Floating			
			<b>0,55mm Wear Layer</b> <b>1220 x 185 x 10,5mm   48 x 71/4 x 3/8"</b>

## Classification properties - EN 655 + EN 649 + EN 14085

Wearing group	EN 660-1	Thickness loos ( $\Delta$ lmm)	Wear group T
Overall thickness (Vinyl + Cork layer)	ISO 24346	mm	$\geq 3,0$
Thickness of wear layer (Wear Group T)	ISO 24340	mm	$\geq 0,55$
Castor chair	EN 425	Visual effect - after 25 000 cycles	No disturbance to the surface other than slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a type 2 foot

## Safety properties - EN 14041

Fire resistance	EN 13501-1	Class	B <sub>fls1</sub>
Slip classification	EN 13893	Class	DS
Formaldehyde emission	DIN EN 717-1	Class	E1
Electrical behaviour	EN 1815	kV	Antistatic
Content pentachlorophenol (PCP)	CEN/TR 14823 (Ihd-W 409)	mg/Kg	PCP free
	EN 14041 Annex B	%	-

## Additional properties

Stains resistance	ISO 26987 (a)	Grade	Grade 0 (b) Iodine Grade 2 (b)
Thermal resistance	EN 12667	(m <sup>2</sup> K)/W	0,093
Impact sound reduction	ISO 140-8	dB ( $\Delta$ Lw)	16
Walking noise	IHD - W431	dB (A)	Reduction improvement 11,4 dB(A) Difference of loudness 45,4%



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



Global GreenTagCert™ is an independent certification and rating scheme for green products, recognized by the Green Building Councils of Australia and New Zealand.

This certification also allows the products to be listed in the Ecospecifier Global eco-products.

(a) The following products were tested: Desinfectant, C<sub>2</sub>H<sub>5</sub>OH, NH<sub>4</sub>OH, Citric acid, iodine, petroleum, spirit

(b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong Change















Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on **www.wicanders.com**


# wood Resist<sup>+</sup>


## Formats


1220 x 185 x 10,5mm  
48 x 7 1/4 x 3/8"





RANGE	Go	   
	Essence	 
	Resist	 
	Resist <sup>+</sup>	  
	Hydrocork	  

 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas

 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof



Grey Rustic Pine





White Washed Oak  
E1XH001

1220 x 185 x 10,5mm



Elegant Light Oak  
E1XG001

1220 x 185 x 10,5mm



Elegant Oak  
E1R4001

1220 x 185 x 10,5mm



Elegant Dark Oak  
E1XF001

1220 x 185 x 10,5mm

## Tradition

Traditional golden wooden flooring looks combined with the exclusive natural properties of cork are the perfect features to place in a nursery and create an ambiance rich in beauty and wellbeing.





Sand Oak

E1R1001

1220 x 185 x 10,5mm



Sand Oak





## Antique Frozen Pine

E1XD001

1220 x 185 x 10,5mm

### Nordic

Light tone flooring and clean lines furniture will always appear to amplify spaces.



Antique Frozen Pine



Claw Silver Oak  
E1V3001

1220 x 185 x 10,5mm



Frozen Oak  
E1N9001

1220 x 185 x 10,5mm



Cinder Oak  
E1R7001

1220 x 185 x 10,5mm



wood Resist\*



Dark Grey Washed Oak

E1XJ001

1220 x 185 x 10,5mm



Dark Grey Washed Oak



Light Washed Oak  
E1XI001

1220 x 185 x 10,5mm



Limed Grey Oak  
E1T7001

1220 x 185 x 10,5mm



Grey Washed Oak  
E1XK001

1220 x 185 x 10,5mm





Chalk Oak

E1Q1001

1220 x 185 x 10,5mm



European Nature Oak

E1XE001

1220 x 185 x 10,5mm



Provence Oak

E1Q3001

1220 x 185 x 10,5mm



Smoked Rustic Oak

E1U4001

1220 x 185 x 10,5mm



## Cottage

There is no place like a smart place.

Equip your office with a contemporary rustic beauty and functionality. Pick your favourite earthy hue and wood texture and enjoy the silence and impact resistance that Wicanders products provide.

These genuine nature-infused Cottage looks will layer up your working space with organic warmth that feels both fresh and real, light and grounded.

Clean-cut furniture and daily-office objects are all you need to embrace the full design concept and maintain a balanced contemporary Cottage style.



Alaska Oak

E1Q0001

1220 x 185 x 10,5mm



Alaska Oak



wood Resist\*



Antique Smoked Pine

E1XB001

1220 x 185 x 10,5mm




Antique Smoked Pine



Antique Washed Pine  
E1XC001

1220 x 185 x 10,5mm







Bleached Oak  
E1XO001

1220 x 185 x 10,5mm



European Smoked Oak  
E1L7001

1220 x 185 x 10,5mm



Oiled Nature Oak  
E1XN001

1220 x 185 x 10,5mm



Dark Red Oak  
E1XL001

1220 x 185 x 10,5mm



Dark English Oak  
E1XM001

1220 x 185 x 10,5mm



## Reclaimed

The Reclaimed style is a lasting interior design trend characterized by design with a story to tell – from flooring, furniture, to other decor elements, all convey a fresh message of time passed.

The flooring is rich in contrast and natural textures achieved by what seems, overlapping layers of colours worn by time. In your living room, these flooring looks will act as the perfect set for solid-colours and patterned decor elements.



### Grey Rustic Pine

E1W2001

1220 x 185 x 10,5mm



### Nature Rustic Pine

E1XA001

1220 x 185 x 10,5mm



### Brown Rustic Pine

E1W1001

1220 x 185 x 10,5mm



Dark English Oak



# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

AGGLOMERATED CORK 2,7MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC


INTEGRATED CORK UNDERLAY 1,2MM





# Finishing & Warranty

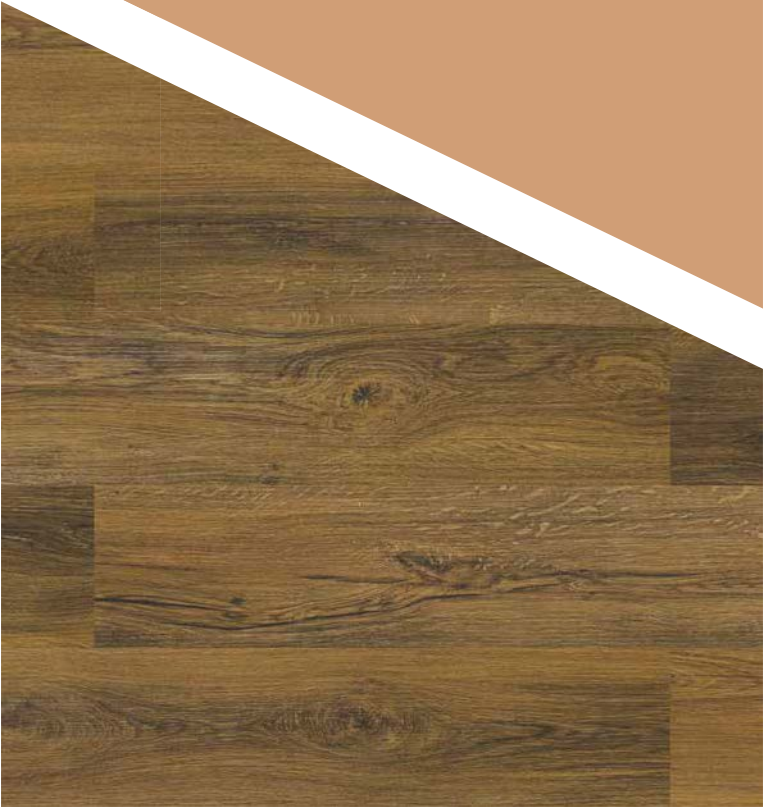

HPS surface finish (High Performance Surface) has been specially developed for areas with heavy traffic, such as commercial, business or general public areas. This high performance surface has an extra hard wearing surface combined with Nano-Beads Technology, where extremely tiny beads are embedded in a top layer for improved properties such as scratch, slip, scuff and stain resistance.



# Technical Data Sheet

Floating			
			0,55mm Wear Layer   HPS 1220 x 185 x 10,5mm   48 x 71/4 x 3/8"
Level of use Domestic	ISO 10874	Class	
Level of use Commercial	ISO 10874	Class	
Wear layer binder content	ISO 10582	-	TYPE I
	Standard-Test Method	Unit	Specification EN 14085 + ISO 10582

## General properties

Nominal thickness for cork surfaces	ISO 24342	mm	2,7
Straightness measured at the surface layer	ISO 24342	mm	≤ 0,30
Squareness	ISO 24342	mm	≤ 0,20
Total mass per unit area average	ISO 23997	g/m <sup>2</sup>	Nominal value (9210) - 10 % + 13%
Dimensional stability (humidity)	EN14085 Annex C	%	≤ 0,25
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,15
Flatness of the panel (Length - concave / convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - concave / convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15
Residual indentation	ISO 24343-1	mm	≤ 0,10
Colour fastness	ISO 105-BO2 Method	Blue wool scale	≥ 6

## Classification properties - EN 14085

Thickness swelling	ISO 24336	%	≤15
Effect of castor chair	ISO 4918	Visual effect	No disturbance to the surface other than slight change in appearance and no delamination shall occur
Effect of a furniture leg	ISO 16581	Visual effect	No damage shall be visible when tested with foot type O
Thermal resistance	EN 12667	(m <sup>2</sup> K)/W	≤ 0,11



# Technical Data Sheet

Floating			
			<b>0,55mm Wear Layer   HPS</b> <b>1220 x 185 x 10,5mm   48 x 71/4 x 3/8"</b>

## Safety properties - EN 14041

Fire resistance	EN 13501-1	Class	B <sub>fl</sub> s1
Slip resistance	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	%	PCP Free

## Other performance properties

Impact sound reduction	EN ISO 10140-3:2010	dB (Δ L <sub>w</sub> )	17
Reflected walking noise Improved measure Difference of loudness [Sone] relative difference	IHD - W - 431	dB (A) %	9,5 49



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on [www.wicanders.com](http://www.wicanders.com)

# wood hydracork















## Formats

1225 x 145 x 6mm  
48 7/32 x 5 11/16 x 1/4"


1225 x 195 x 6mm  
48 7/32 x 7 11/16 x 1/4"




Floating


RANGE	Go	   
	Essence	 
	Resist	 
	Resist <sup>+</sup>	  
	Hydrocork	  


 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas

 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof



Century Morocco Pine



# NO PROBLEM. IT'S HYDROCORK.

**hydrocork** READY FOR REAL LIFE



**DURABLE,  
RESISTANT**  
AND EASY TO MAINTAIN





**100% WATERPROOF**

# EASY AND FAST INSTALLATION

## STABLE AND STRONG INSTALLATION WITH COMPRESSION SYSTEM

PressFit is a revolutionary compression system that takes full advantage of the amazing cork properties - flexibility, elasticity and compressibility - functioning like a cork stopper

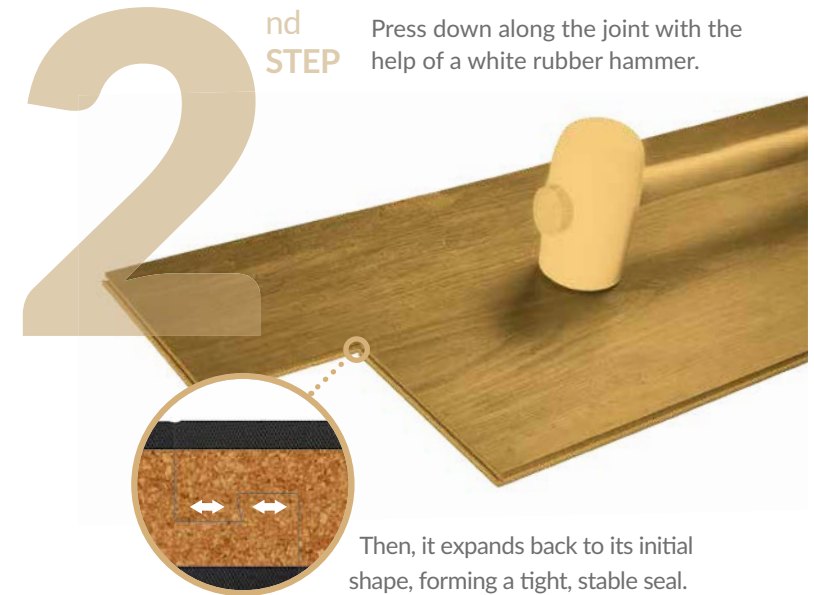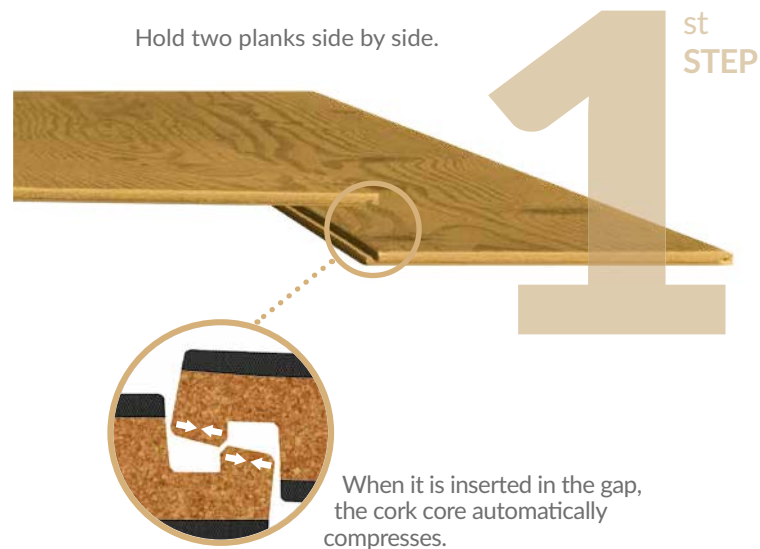

## REDUCED INSTALLATION COSTS

Hydrocork is only 6mm thick making it easy to cut. Avoids the need to remove the existing skirtings or to cut doors and it can be installed on top of other flooring materials.



\* Please see the terms and conditions of Wicanders Limited Warranty in the website.



Promotes global sustainability, environmental health, and safety.





## Castle Raffia Oak

\*B5P0001

1225 x 145 x 6mm



## Castle Toast Oak

\*B5P1001

1225 x 145 x 6mm



Castle Toast Oak

## Tradition

No problem.  
It's ready for real life.

An open plan kitchen must boast a stylish vibe and sense of wellbeing with measured sobriety.

With Hydrocork, you no longer need to be worried if the flooring is able to endure the test of time in a gracious way and how it resists impacts. You don't even need to fear over daily spillings due to its waterproof endurance.

Take advantage of it being ideal for renovations and place it on top of previously existing surfaces, or simply achieve a total look throughout your home with the same look in your kitchen, living room, bathroom and bedrooms.

Ten Traditional wood looks to choose from and complement with industrial, minimalist or even rustic designs.



European Oak

\*B5Q2001

1225 x 145 x 6mm



Nature Oak

\*B5T5001

1225 x 145 x 6mm



Elegant Oak

\*B5R4001

1225 x 145 x 6mm



\*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.







Sand Oak

\*B5R1001

1225 x 145 x 6mm



Wheat Oak

B5WR001

1225 x 195 x 6mm



Linen Cherry

\*B5R0001

1225 x 145 x 6mm



Light Beech

\*B5T0001

1225 x 145 x 6mm



Wheat Pine

\*B5R3001

1225 x 145 x 6mm

\*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.





## Nordic

This style is characterized by simple yet rich decor elements. Mixing different clean cut chairs can be the fun approach that will help to provide life without losing the functionality that is part of the Nordic design.



Arcadian Artic Pine  
B5WT001

1225 x 195 x 6mm





Arcadian Artic Pine



Claw Silver Oak

\*B5V3001

1225 x 145 x 6mm



Limed Grey Oak

\*B5T7001

1225 x 145 x 6mm



Cinder Oak

\*B5R7001

1225 x 145 x 6mm

\*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.





Arcadian Soya Pine

\*B5P4001

1225 x 145 x 6mm



Arcadian Rye Pine

\*B5P5001

1225 x 145 x 6mm



Century Fawn Pine

\*B5P7001

1225 x 145 x 6mm



Century Morocco Pine

\*B5P6001


1225 x 145 x 6mm

## Cottage

Places where  
life is celebrated  
every day.

Flooring can either be the focal point of a room, or a background that aggregates other design elements. It's important to have a clear goal in each new design project in order to guarantee a consistent layout. When you've that figured out, it's with ease that you'll be able to extend your personality into your special space.

A bedroom should mirror relaxation and comfortable atmosphere to provide only pleasant moments. For a modern Cottage style that will be wrapped up with flooring as the background, choose a darker flooring hue that will enable the other decor elements to pop up.

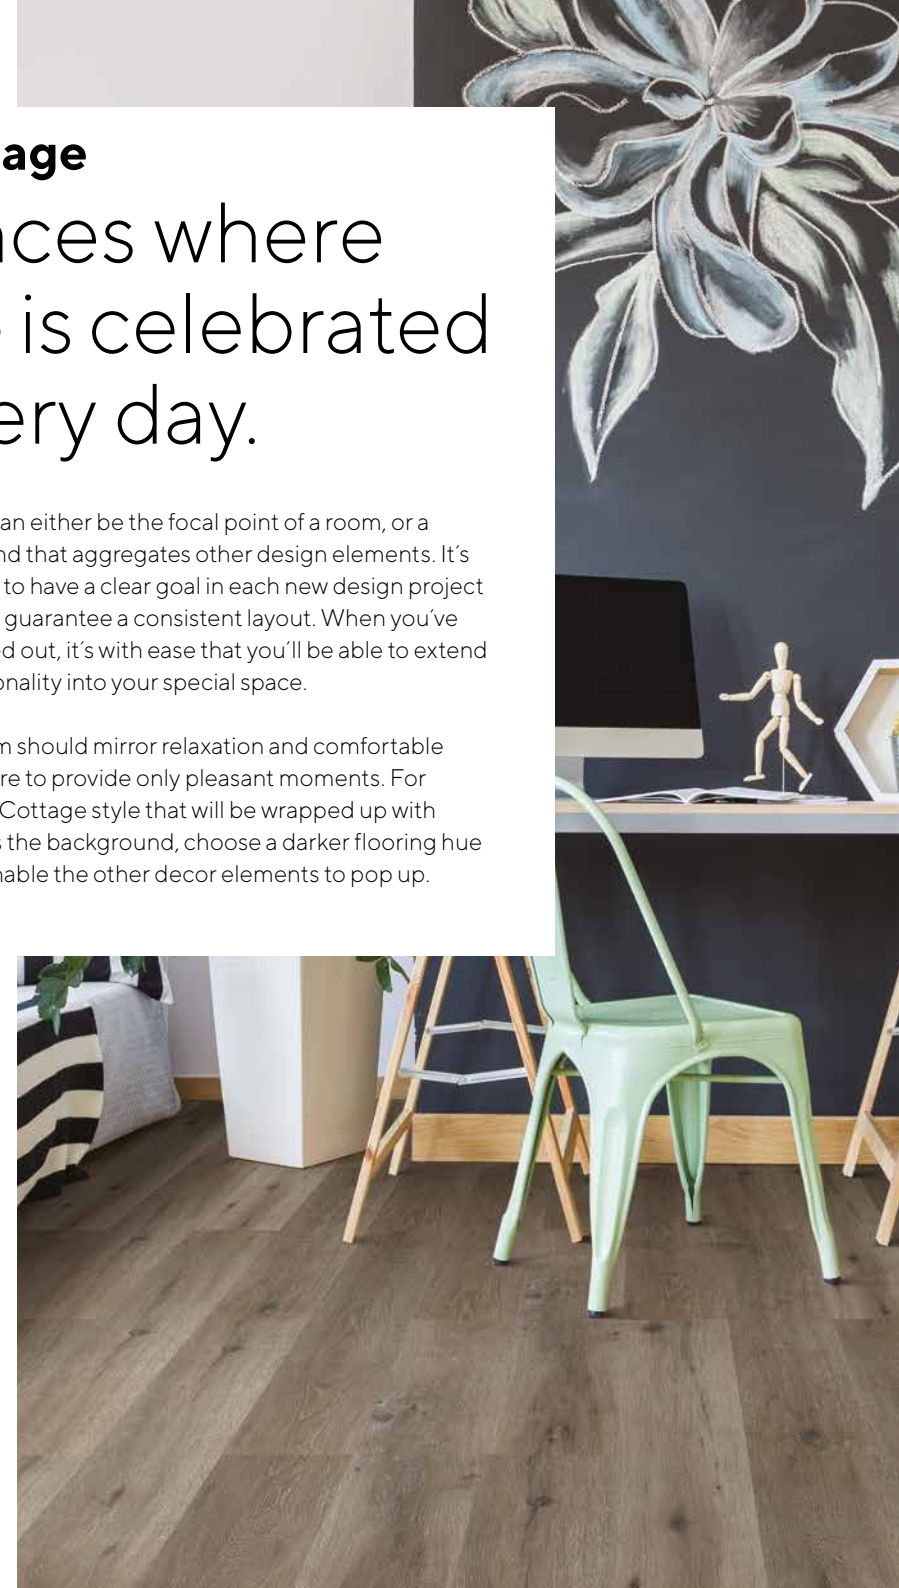



Alaska Oak

\*B5Q0001

1225 x 145 x 6mm



Chalk Oak

\*B5Q1001

1225 x 145 x 6mm



Rustic Fawn Oak

B5WU001

1225 x 195 x 6mm



Light Dawn Oak

B5WS001

1225 x 195 x 6mm



Rustic Grey Oak

B5WV001

1225 x 195 x 6mm

Rustic Fawn Oak

\*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.








## Reclaimed

Reclaimed wood visuals look great in a commercial space such as a boutique coffee.

The strong antique looking flooring has the ability to add history, character and personality to any space.



Sylvan Gold Oak  
B5L8001

1225 x 195 x 6mm



Sylvan Brown Oak  
B5WQ001

1225 x 195 x 6mm



Sawn Bisque Oak  
\*B5P3001

1225 x 145 x 6mm




Sawn Twine Oak  
\*B5P2001

1225 x 145 x 6mm

\*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.



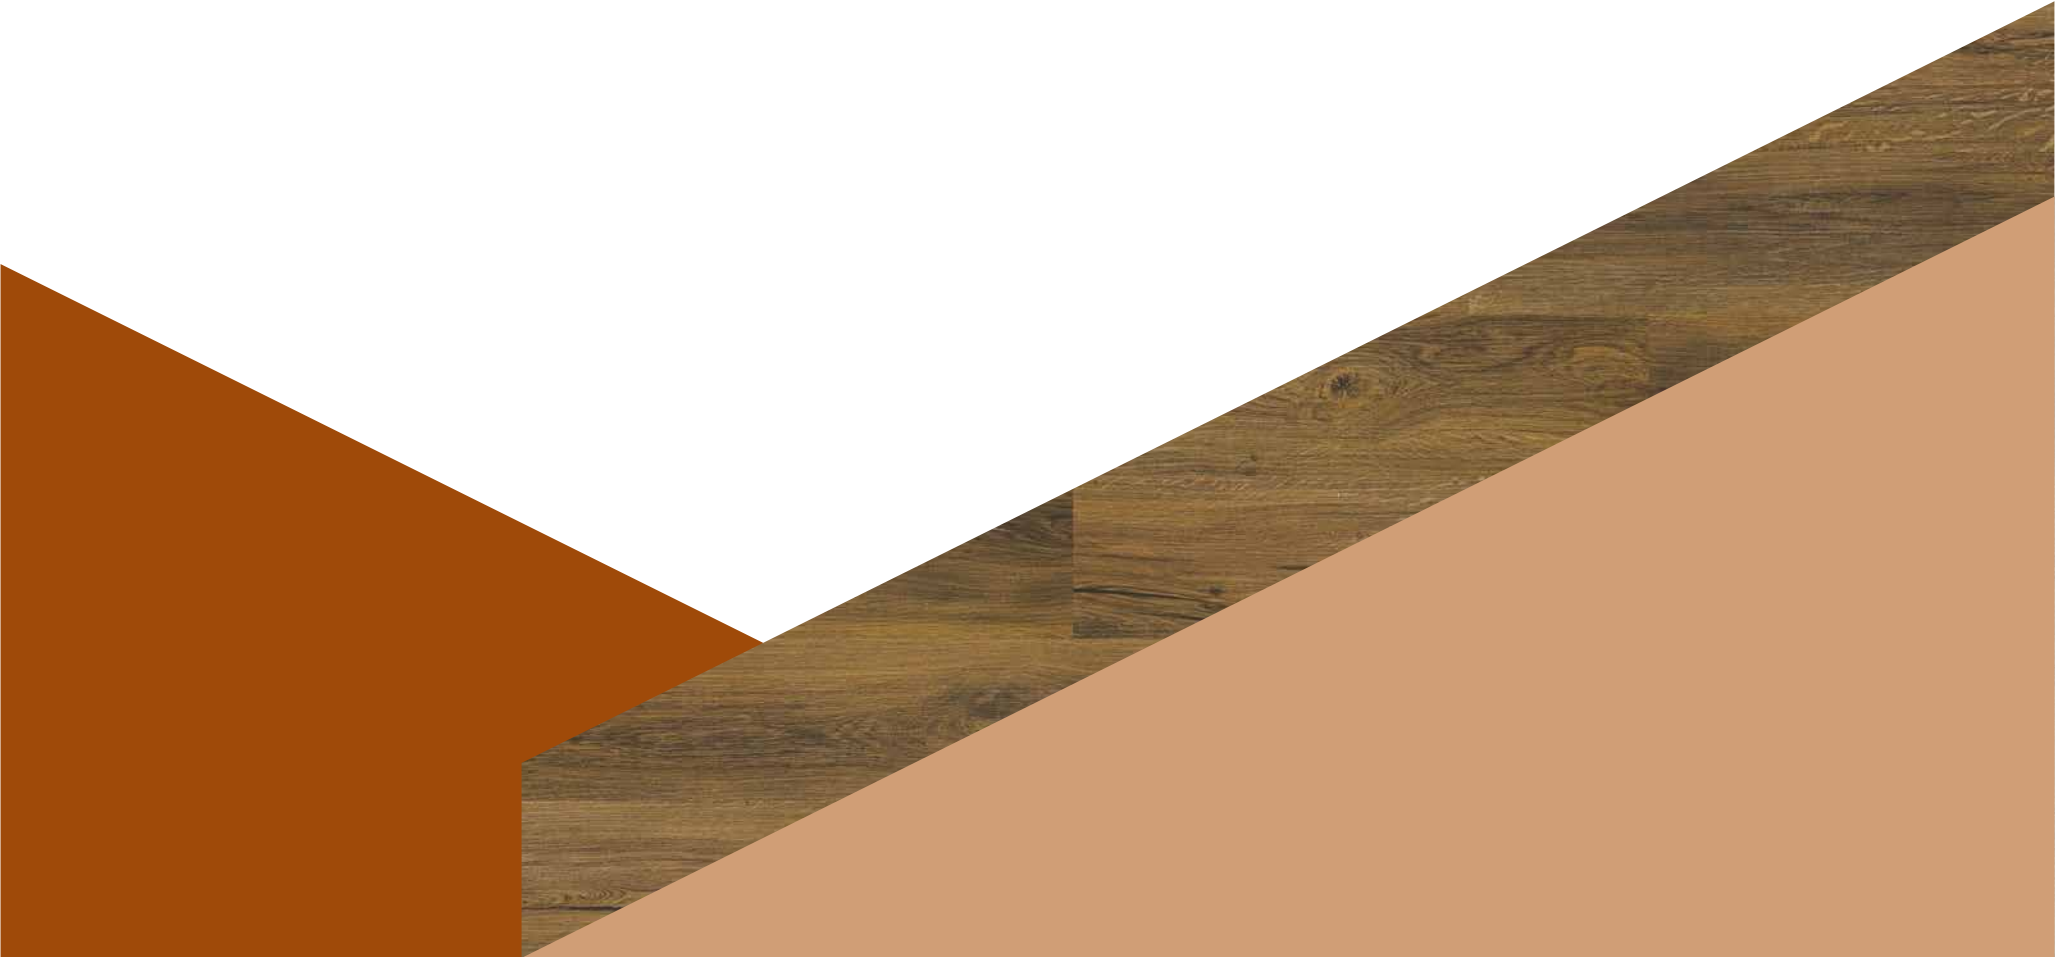

# Technical solution


PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK COMPOSITE CORE WITH PRESSFIT 3MM

BALANCING VINYL LAYER

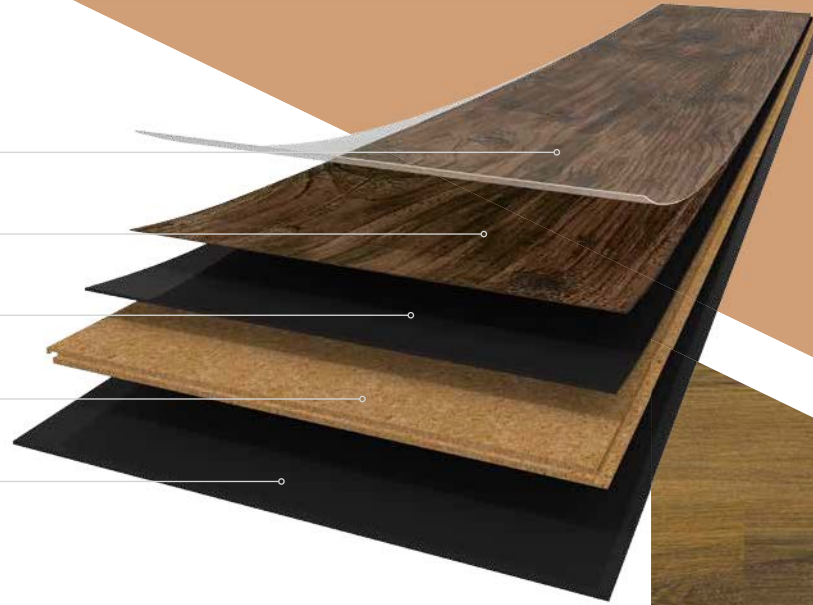

# Finishing & Warranty



Suitable for Heavy Traffic Residential areas  
and Heavy Traffic Commercial areas.





\*Please see the terms and conditions of Wicanders Limited Warranty on the website.





# Technical Data Sheet

Low thickness floating			
			<b>0,55mm Wear Layer</b> <b>1225 x 145 x 6mm</b>   48 7/32 x 5 11/16 x 1/4" <b>1225 x 195 x 6mm</b>   48 7/32 x 7 11/16 x 1/4" <b>605 x 145 x 6mm</b>   23 13/16 x 5 11/16 x 1/4"
Level of use Domestic	ISO 10874	Class	
Level of use Commercial	ISO 10874	Class	
	Standard	Unit	Specification

## General properties - ISO 10582 + EN 14085 + EN 14041

Dimensions: Width: Length:	ISO 24342	mm	+/- 0,10% up to max. 0,5 max. 2,0
Overall thickness	ISO 24346	mm	nominal +/- 0,25
Squareness	ISO 24342	mm	≤ 0,50
Straightness measured at the surface layer	ISO 24342	mm	≤ 0,30
Mass per unit area	ISO 23997	g/m²	Nominal +13% / -10%
Dimensional stability (humidity)	EN 14085 Annex C/ EN 669	mm	≤ 5
Dimensional stability and curling after exposure to heat	ISO 23999	%	≤ 0,25
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,20
Flatness of the panel (Length - concave / convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - concave / convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15
Residual indentation	ISO 24343-1	mm	≤ 0,1
Colour fastness	ISO 105-BO2	Blue wool scale	≥ 6

## Classification properties - ISO 10582 + EN 14085

Wear layer thickness (wear layer binder content type 1)	ISO 24340	mm	0,55
Thickness swelling	ISO 24336	%	≤ 15
Castor chair	EN 425	Visual effect - after 25.000 cycles	No disturbance to the surface other than a slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a type O foot

### Low thickness floating

**0,55mm Wear Layer**  
**1225 x 145 x 6mm** | 48 7/32 x 5 11/16 x 1/4"  
**1225 x 195 x 6mm** | 48 7/32 x 7 11/16 x 1/4"  
**605 x 145 x 6mm** | 23 13/16 x 5 11/16 x 1/4"

#### Safety properties - EN14041

Fire resistance	ISO 11925-2/ISO 9239-1 (classification according to EN 13501-1)	Class	B <sub>fl</sub> -s1
Slip resistance	EN13893	Class	DS
Formaldehyde emission	DIN EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	%	Undetectable

#### Additional properties

Stains resistance	ISO 26987 (a)	Grade	Grade 0 (b) Iodine grade 2 (b)
Thermal resistance	EN 12667	(m²K)/W	0,05
Impact sound reduction	ISO 140-8	dB (ΔL <sub>w</sub> )	16 dB
Walking sound	IHD -W431	dB (A)	Reduction improvement 11,1dB Difference of loudness 51,1%
Swelling of the joints (Moisture Exposure)	IHD 423	mm	No visible effect

#### ASTM Standards

Airborne sound Transmission Loss	ASTM E90 /ASTM E413	STC (dB)	62 dB
Impact sound transmission	ASTM E492 /ASTM E989	IIC (dB)	61 dB
Impact sound transmission	ASTM E2179	ΔIIC	16 dB
Smoke density	ASTM662	KW/m²	Flaming & non flaming ≤ 450
Radiant panel (critical radiant flux)	ASTM E648	(W/cm²)	≥ 0,45 W/cm² Exceeds, Class I
Thermal resistance	ASTM C177	R-value (m²K)/W	0,0432
Residual indentation	ASTM F1914	%	0,4%
Static load limit	ASTM F970	in or mm	≤ 0,005 in (load of 250 lb) ≤ 0,127 mm (load of 113.4 Kg)
Ignition characteristics of finished textile floor covering systems	ASTM D2859	-	Meets the criteria



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



Global GreenTagCert™ is an independent certification and rating scheme for green products, recognized by the Green Building Councils of Australia and New Zealand. This certification also allows the products to be listed in the Ecospecifier Global eco-products.

- (a) The following products were tested: disinfectant, C<sub>2</sub>H<sub>5</sub>OH, NH<sub>4</sub>OH, citric acid, iodine, petroleum, spirit
- (b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong change

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on **www.wicanders.com**



# Get the best results with Wicanders accessories



## Underlays

### Increased comfort and insulation

To reinforce the already amazing insulation properties of cork flooring, Wicanders provides Acousticork, a cork underlay which lets you turn your home into an even cosier space.

Acousticork reduces the walking sound and heat dispersion. Overall, it makes rooms cosier and more peaceful, which is essential in making any house feel like home.

For Hydrocork products, if you wish to use underlay, please consult Wicanders website or your supplier for more information.

- High durability and long term resilience
- Increases floor thermal insulation
- Natural and sustainable product
- Easy to handle and install



## Maintenance

### Optimal care for an everlasting beauty

To keep your floor spotless, Wicanders has available a set of auxiliary products. Each of these has a specific purpose and is designed to make the caring of your floor as easy as possible.

#### Regular Maintenance



##### **Wicanders Soft Cleaner**

This mild detergent is appropriate for weekly or even daily cleaning. It can be used to remove dirt, stopping it from infiltrating in the joints and in the regular embossing of the product.



##### **Wicanders Spray Cleaner**

Designed for regular cleaning, this mild detergent has the advantage of being a spray, which makes it a quick and easy solution to apply directly on the floor. It is very effective in cleaning dirt or grease stains.



## Skirtings

### The perfect match to make a pleasant interior

In order to help create a more classy and harmonious interior, Wicanders provides skirting profiles to complement your floor. Create your ideal transition between the walls and the floor, whether by an exact match or contrasting colours.

Contact your supplier for information on the available skirting references.





## CREATED BY HUMANS, INSPIRED BY NATURE

Wicanders represents an unique balance between the creation of innovative products and the protection of the environment, combining state-of-the-art technology with the amazing natural properties of cork.



**A green production process** – Cork waste resulting from the industrial process is 100% reincorporated into the production, creating an ecologically virtuous cycle.



**Intensive use of biomass** – The cork powder resulting from the industrial process is burned in order to create biomass which is then used as a major source of energy to supply the production facilities, allowing Wicanders also to base its production in a sustainable source of energy.



**Low carbon emission** – Cork's natural property of retaining CO<sub>2</sub> combined with an eco-sustainable industrial process allows Wicanders to develop eco-efficient products with a low carbon emissions factor, positively contributing to a sustainable environment.



**Indoor Air Quality** – Refined to be free of harmful phthalates Wicanders products have been awarded with worldwide indoor air quality certifications such as Greenguard Gold or A+.



**Negative Global Warming Potential** – The majority of Wicanders products contribute to reduce global warming, since they retain more CO<sub>2</sub> than they emit.

# CORK - A SUSTAINABLE RAW MATERIAL

Cork comes from the bark of the Cork Oak, a slowly growing tree from the Mediterranean basin that may live for 200 years and plays a central role in the social and economic development of this region.



**Truly environmental-friendly** - The extraction of cork and its related industries are remarkably sustainable, since the tree is never cut or damaged during the extraction process and the bark regenerates after each harvest.



**Positive ecological impact** - It is estimated that the Portuguese cork oak forest - montado - is responsible for retaining 5% of the country's annual CO<sub>2</sub> emission, representing 4.8 million tons per year.




**An activity that crosses generations** - Cork Oaks are manually harvested for the first time when the tree is 25 years old and then every 9 years making it an activity that passes from generation to generation.



**A positive economic and social impact** - Cork harvesting is a regular and cyclical process that contributes to environmental, economic and social sustainability of the rural areas in the Mediterranean region.



**Rural areas economic engine** - The cork activity as well as related activities fueled by this industry create jobs in many rural areas of the country, encouraging people to settle there.

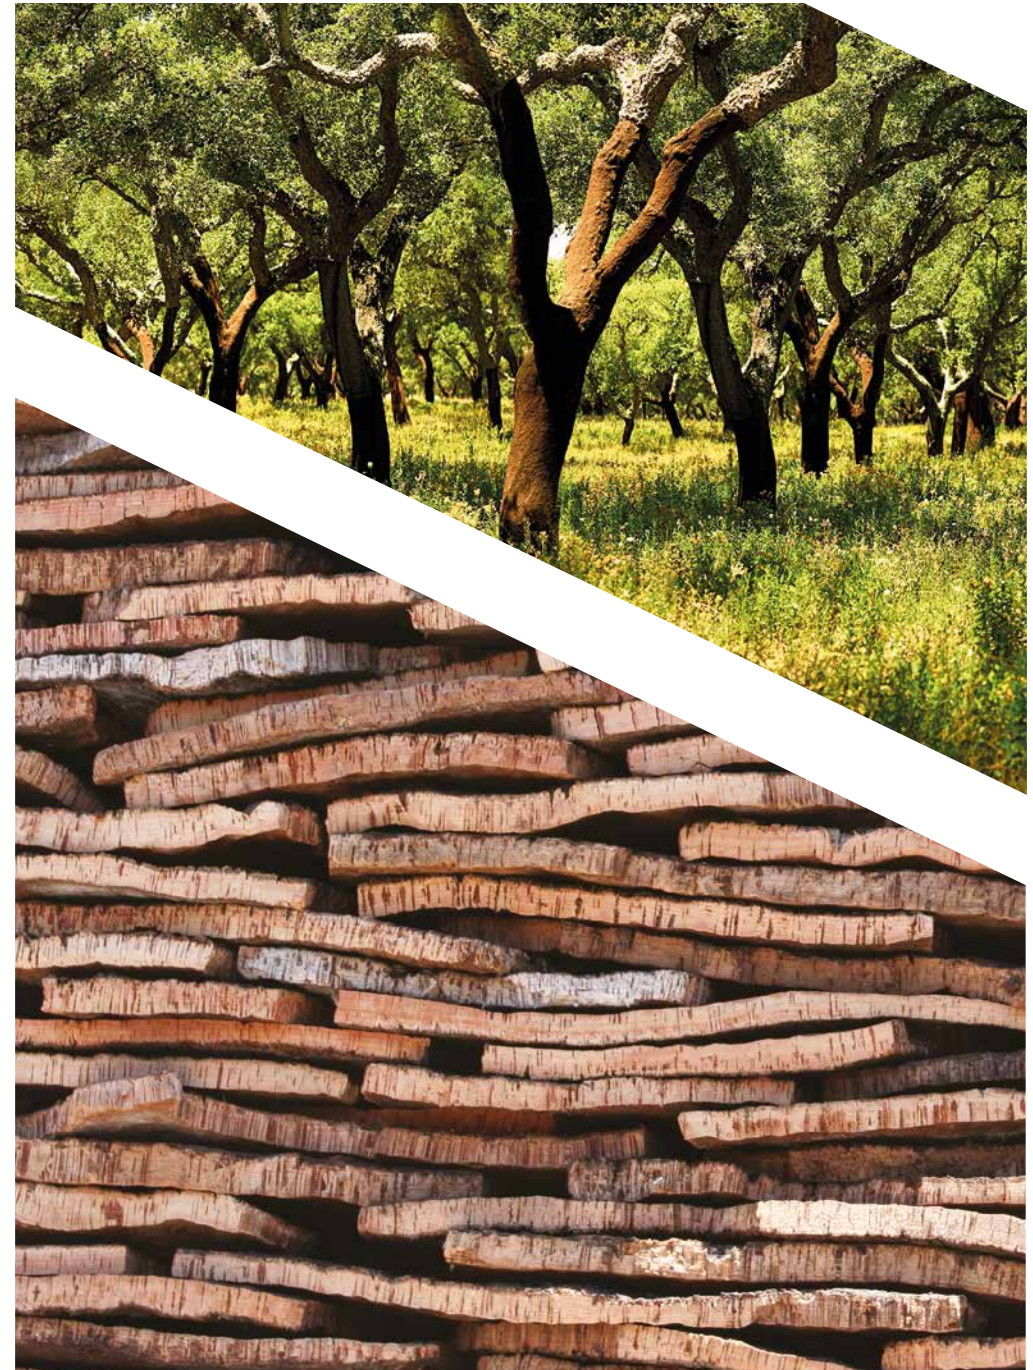



# Product Selector

RANGE	Go		Essence		Resist	Resist*	hydracork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm   inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"
Alaska Oak		BOQ0003				E1Q0001	B5Q0001	
Amber Cherry		BOQ7003						
Antique Frozen Pine						E1XD001		
Antique Smoked Pine						E1XB001		
Antique Washed Pine						E1XC001		
Arcadian Artic Pine								B5WT001
Arcadian Rye Pine					B0P5001		B5P5001	
Arcadian Soya Pine					B0P4001		B5P4001	
Bark Oak		BOV8001						
Bleached Oak						E1XO001		
Blonde Oak	BON1001							
Brown Rustic Pine						E1W1001		
Brume Oak		BON8001						
Castle Raffia Oak					B0P0001		B5P0001	
Castle Toast Oak					B0P1001		B5P1001	
Century Fawn Pine					B0P7001		B5P7001	

RANGE	Go		Essence		Resist	Resist*	hydracork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm   inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8"	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"

Century Morocco Pine					B0P6001		B5P6001	
Chalk Oak		B0Q1003				E1Q1001	B5Q1001	
Cinder Oak					B0R7001	E1R7001	B5R7001	
Classic Nature Oak	B0S3001							
Classic Prime Oak				D8F4001				
Claw Silver Oak					B0V3001	E1V3001	B5V3001	
Coal Oak				D8F2001				
Country Prime Oak				D8F8001				
Croft Oak		B0V9001						
Dapple Oak				D8F1001				
Dark English Oak						E1XM001		
Dark Grey Washed Oak						E1XJ001		
Dark Red Oak						E1XL001		
Elegant Dark Oak						E1XF001		
Elegant Light Oak						E1XG001		
Elegant Oak					B0R4001	E1R4001	B5R4001	



# Product Selector

RANGE	Go		Essence		Resist	Resist*	hydracork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm   inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"
European Nature Oak						E1XE001		
European Oak		BOQ2004					B5Q2001	
European Smoked Oak						E1L7001		
Fall Pine	BOS0001							
Frozen Oak		BON9001				E1N9001		
Glacier Rustic Pine			D822003					
Golden Prime Oak				D8F7001				
Grey Rustic Pine						E1W2001		
Grey Washed Oak						E1XK001		
Highland Pine	BOS1001							
Indian Dark Oak	BOS5001							
Inspired Pine			D898001					
Ivory Chalk Oak			D887001	D887002				
Ivory Salt Oak	BON2001							
Light Beech					B0T0002		B5T0001	
Light Dawn Oak								B5WS001

RANGE	Go		Essence		Resist	Resist*	hydreacork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm   inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"

Light Sucupira		B009001						
Light Washed Oak						E1XI001		
Limed Grey Oak					B0T7001	E1T7001	B5T7001	
Limed White Rustic Oak	B0WB001							
Linen Cherry					B0R0001		B5R0001	
Midnight Oak		B0M5001						
Natural Larch	B0W5001							
Nature Oak					B0T5001		B5T5001	
Nature Rustic Pine						E1XA001		
Nebraska Rustic Pine			D885001	D885002				
Nebula Oak				D8F3001				
Nordic Ash					B0V4001			
Oiled Nature Oak						E1XN001		
Oiled Taupe Oak	B0WA001							
Old Larch	B0W6001							
Platinum Chalk Oak			D886001	D886002				



# Product Selector

RANGE	Go		Essence		Resist	Resist*	hydra <del>re</del> cork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm   inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"
Platinum Oak		BOM6001						
Polar Nature Oak	BOR9001							
Prime Arctic Oak				D8F6001				
Prime Desert Oak				D8F5001				
Prime European Cherry			D826003					
Prime Rustic Oak			D884002	D884001				
Provence Oak		BOQ3003				E1Q3001		
Quartz Larch	BOW3001							
Rustic Eloquent Oak				D8F9001				
Rustic Fawn Oak								B5WU001
Rustic Forest Oak				D8G0001				
Rustic Grey Oak								B5WV001
Rustic Limed Gray Oak					BOU0001			
Rustic Taupe Oak	BOWC001							
Sand Oak					BOR1001	E1R1001	B5R1001	
Savanna Limed Oak	BON6001							




































RANGE	Go		Essence		Resist	Resist*	hydre <sup>cork</sup>	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm   inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"

Sawn Bisque Oak					B0P3001		B5P3001	
Sawn Twine Oak					B0P2001		B5P2001	
Shell Oak	B0N4001							
Smoked Rustic Oak					B0U4001	E1U4001		
Sorrel Carve Oak			D838003	D838004				
Storm Oak	B0N3001							
Sylvan Brown Oak								B5WQ001
Sylvan Gold Oak								B5L8001
Washed Arcaine Oak				D8G1001				
Washed Castle Oak				D8G4001				
Washed Haze Oak				D8G2001				
Washed Highland Oak				D8G3001				
Wheat Oak								B5WR001
Wheat Pine					B0R3001		B5R3001	
White Oak		B0M8001						
White Washed Oak						E1XH001		





# Wicanders' range

LOOKS				
	cork	wood	stone	
RANGE	Go	  	  	  
	Essence	 	 	 
	Resist	—	 	—
	Resist <sup>+</sup>	 	  	  
	Hydrocork	—	  	  
	Pure	  	—	—
	Parquet	—	 Engineered wood	—



Heavy Traffic Residential areas



Moderate Traffic Commercial areas



Medium Traffic Commercial areas



Heavy Traffic Commercial areas



Budget products



Glue down



Extra Cork



Waterproof



# WICANDERS®

Nature at your feet



AMORIM

#### HeadQuarters

Amorim Revestimentos S.A

(+351) 227 475 600

geral.ar@amorim.com

[www.wicanders.com](http://www.wicanders.com)

DE	Amorim Deutschland GmbH (+49) 4221 5 93-01 .....	germany.ar.de@amorim.com
BE NE LUX	Amorim Benelux B.V. (+31) 166 604 111 .....	info.ar.nl@amorim.com
AT	Amorim Deutschland GmbH (+43) 1 54 51 65 10 .....	austria.ar.de@amorim.com
CH	Amorim Flooring Switzerland AG (+41) 41 726 20 20 .....	info@amorim.ch
PT	Amorim Revestimentos, S.A. (+351) 227 475 600 .....	geral.ar@amorim.com
ES	Amorim Revestimentos, S.A. (+34) 902 307 407 .....	info.ar.es@amorim.com
FR	Amorim Revestimentos, S.A. (+33) 800 914 848 .....	info.ar.fr@amorim.com
DK	Timberman Denmark A/S (+45) 995 252 52 .....	timberman@timberman.dk
PL	Dom Korkowy, Sp. z o.o. (+48) 126 379 639 .....	krakow@domkorkowy.pl
US	Amorim Flooring North America (+1) 410 553 60 62 .....	info.ar.us@amorim.com
RU	Amorim Flooring Rus, OOO (+7) 495 280 7860 .....	info.ar.ru@amorim.com

63749MT\_INT | Rev000 | Dec2017

